

High capacity,
small
footprint

MCC Cold self serve



The modular convenience counters offer you the best, in every aspect



High Capacity

Highest capacity on a small footprint: Up to 30%* more display surface



Total Visibility

Up to 75%* more product visibility due to transparent sides, top and shelves



Best Performance

Maximum food safety, extended shelf life and less waste



Mix & Match

Unlimited possibilities and combinations with other hot & cold MCC's



Green Efficiency

Low total cost of ownership & environmental friendly green technologies


*Compared to competition according to global ISO standards - TDA ISO 23953

MCC Cold self serve open display

- 3 level refrigerated self serve open display cabinet
- Designed for packaged products
- 900, 1200 or 1500 mm wide
- Unlimited possibilities in combining hot and cold, side-by-side
- Available as solid back or with soft closing glass doors on operator side
- Available as floor model or as drop-in, adaptable to any store design
- Ready to plug in for quick and easy installation
- Underframe floor model available in any RAL colour
- Slim transparent shelves with adjustable height and angle
- LED lighting with natural colour reproduction on each shelf
- Eco-friendly: R290 refrigerant | 3M1 Classification
- Product temperature maintained between -1°C and 5°C (3M1)
- Thermo pane glass – increased insulation
- Point-of-sales promotion options
- Optional evaporation tray
- Total display area:
 - MCC 90: 1,2 m²
 - MCC 120: 1,6 m²
 - MCC 150: 2,1 m²
- Also available as
 - MCC Cold self serve display with glass doors on customer side
 - MCC Cold full serve






Three presentation levels




OmniCold air flow technology




Optimal visibility

	MCC 90 Cold	MCC 120 Cold	MCC 150 Cold
Width	900 mm	1200 mm	1500 mm
Depth	750 mm	750 mm	750 mm
Height on stand	1420 mm	1420 mm	1420 mm
Height drop-in	1320 mm	1320 mm	1320 mm
Energy class EU Energy Efficiency Index (EEI)			
Temperature class	3M1	3M1	3M1
Voltage	1N~ 230V	1N~ 230V	1N~ 230V
Frequency	50 Hz	50 Hz	50 Hz
Power	0,49 kW	0,70 kW	0,83 kW
Refrigerant/GWP	R290 / 3	R290 / 3	R290 / 3


MCC Cold on stand




900/1200/1500

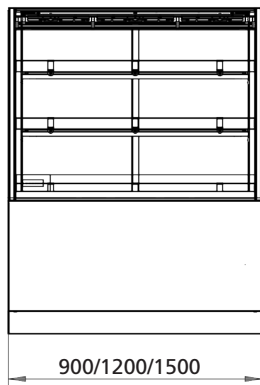


900/1200/1500

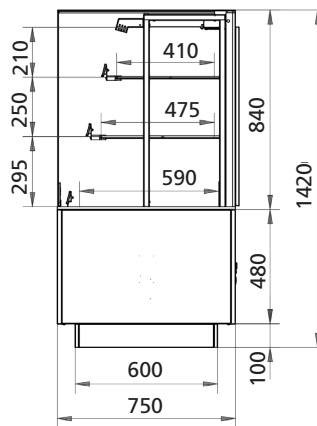


MCC Cold drop-in



900/1200/1500

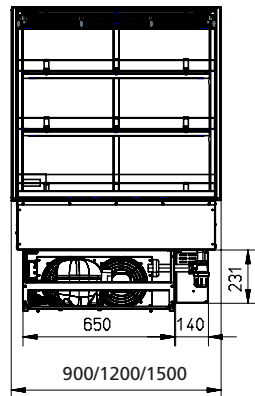

900/1200/1500

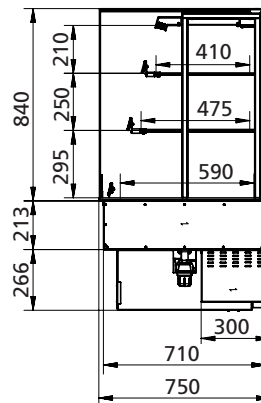

Including base and drop-in



Stand alone and inline



Self serve and full serve