

**3 YEARS WARRANTY**  
PARTS & LABOR

# SPIKA NG 125

115 V / 60 Hz

## SELF-CONTAINED ICE CUBE MACHINE

### FEATURES

- ▶ PRODUCES FULL DICE ICE CUBES OR HALF DICE ICE CUBES
- ▶ STIF: STRONG INOX FRAME. SOLID MACHINE STRUCTURE IN 4 COLUMNS WITH AISI 304 STAINLESS STEEL FRAME
- ▶ STRONGEST DOOR IN THE MARKET. MADE OF STAINLESS STEEL. OPENING AND DAMPING SYSTEM PATENTED BY ITV
- ▶ FRONT VENTILATION CONCEPT: FRONTAL IN-OUT AIR SYSTEM ALLOWS 'BUILT IN' MACHINES
- ▶ CLEANING SWITCH: ALLOWS CIRCULATION OF WATER WITH DESCALING PRODUCT (CALKIN OR SIMILAR) WITHOUT COOLING
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. PUMP WITHOUT SEALS, WHICH AVOIDS DETERIORATION IN HARD WATER
- ▶ EASI: EASY ACCESS FOR SERVICE & INSTALLATION. ALL PANELS CAN BE DISASSEMBLED SEPARATELY
- ▶ ON/OFF LIGHTED ROCKER SWITCH IN FRONT PANEL
- ▶ TROPICALIZED MACHINES (T CLASS) / STAINLESS STEEL ADJUSTABLE LEGS




	24 H	70°F/21°C	50°F/10°C	90°F/32°C	70°F/21°C	<b>lbs (Kg)</b>	<b>in (mm)</b>	<b>in (mm)</b>	<b>SPIKA HALF DICE</b> 0,9" (W) x 0,4" (D) x 1" (H) 23 mm (W) x 11 mm (D) x 26 mm (H) Average dimensions
SPIKA NG 125 A		<b>146 (66)</b>	<b>114 (52)</b>	<b>44.1 (20)</b>	Width <b>21.07"</b> (535) Depth <b>23.43"</b> (595) Height* <b>31.30"</b> (795)	Width <b>24.41"</b> (620) Depth <b>25.99"</b> (660) Height <b>36.22"</b> (920)	<b>SPIKA FULL DICE</b> 1" (W) x 0,9" (D) x 1" (H) 26 mm (W) x 23 mm (D) x 26 mm (H) Average dimensions		
SPIKA NG 125 W		<b>146 (66)</b>	<b>114 (52)</b>		Height* <b>31.30"</b> (795)	Height <b>36.22"</b> (920)			

\* WITH LEGS 35"/37"

### ACCESSORIES

#### INCLUDED

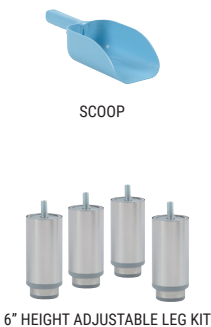


#### NOT INCLUDED (OPTIONAL)



# TECHNICAL SCHEME

SPIKA NG 125

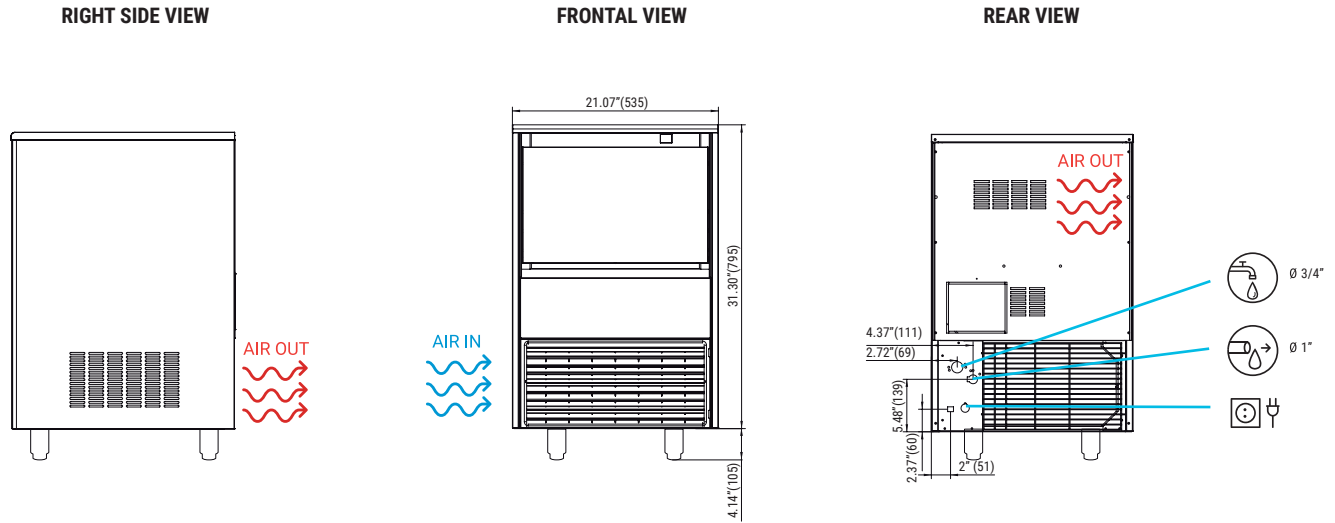

\* All dimensions in inches (and mm)

## OPERATING CONDITIONS

### PRODUCTION (LBS) 60Hz

±10% V

41°F/109°F

41°F/95°F

14.5 psi (1 bar) / 87 psi (6 bar)

75/150 Ice cubes/cycle

V	Hz	ph
115	60	1N



24 H

FULL DICE  
SPIKA NG 125 AIR COOLED

°F	50°	60°	70°	86°
°C	10°	15°	21°	30°
50°	153	145	134	119
68°	146	139	127	111
90°	130	123	114	102
109°	108	97	87	74
43°				

FULL DICE  
SPIKA NG 125 WATER COOLED

°F	50°	60°	70°	86°
°C	10°	15°	21°	30°
50°	153	145	134	119
68°	146	139	127	111
90°	130	123	114	102
109°	108	97	87	74
43°				

## MODELS

MODEL	ASHRAE CONDITIONS (BTU/h)	(W)	(W) 109°F	(AWG/mm <sup>2</sup> ) (n.)	FUSE	100lbs (Kwh/100 lbs) (90°F / 70°F)	gal (l/h)	HEAT REJECTED (BTU/h) (W)	(lbs)	(lbs)			
SPIKA NG 125 A	3,115	913	460	14/1.5	3	15	7.75	25.5	5.9	2,429	712	115	134
SPIKA NG 125 W	3,115	913	460	14/1.5	3	15	5.66	113.8	25.9	2,429	712	115	134



ITV Ice Makers, Inc.  
9550 Satellite Blvd, Suite 100  
Orlando, FL 32837  
Phone: 1 407 826 1860 | Fax: 1 407 826 1861  
Toll Free: 1 888 488 1423  
sales@itvice.com | www.itvice.com



SERVICE  
service@itvice.com  
Skype: service@itvice.com  
PHONE: +1 888 488 1423  
FROM 8AM TO 5PM EST



2 ADDITIONAL YEARS  
ON COMPRESSOR &  
EVAPORATOR  
Read our warranty policy  
to know more about  
limitations and exclusions

