

SPIKA MS400-22

115 V / 60 Hz

MODULAR 22 INCH ICE CUBE MACHINE

3 YEARS
WARRANTY
PARTS & LABOR

FEATURES

- ▶ PRODUCES FULL DICE OR HALF DICE ICE CUBES
- ▶ HIGH EFFICIENCY EVAPORATOR
- ▶ SMART WATER DISTRIBUTOR THAT IMPROVES DROP-OFF EFFICIENCY
- ▶ EASY ACCESS FOR SERVICE BY REMOVING THE PANELS WITH A SINGLE SCREWDRIVER
- ▶ SMART ELECTRONIC BOARD CONTROLS EVERY PARAMETER IN THE MACHINE AND SHOWS THE DIAGNOSIS OF POSSIBLE INCIDENCES
- ▶ HIGH RESISTANCE EXTERNAL FRAME IN AISI 304 STAINLESS STEEL



	24 H	70°F/21°C 50°F/10°C	90°F/32°C 70°F/21°C			
	lbs	lbs (Kg)	lbs (Kg)	in (mm)	in (mm)	Average dimensions
SPIKA MS400-22 H		432 (196)	348 (158)	Width 22" (559) Depth 24" (621) Height 26" (659)	Width 26" (650) Depth 28" (710) Height 32" (820)	SPIKA HALF DICE 0,9" (W) x 0,4" (D) x 1" (H) 23 mm (W) x 11 mm (D) x 26 mm (H)
SPIKA MS400-22 F		- (-)	- (-)			SPIKA FULL DICE 1" (W) x 0,9" (D) x 1" (H) 26 mm (W) x 23 mm (D) x 26 mm (H)

ACCESSORIES

INCLUDED



SCOOP



WATER OUTLET HOSE


NOT INCLUDED



DOUBLE 10" FILTER
ANTI-LIMESCALE + ANTI-CHLORINE
CS102



10" REPLACEMENT CARTRIDGE
ANTI-LIMESCALE + ANTI-CHLORINE
CS10



ADAPTER PLATES



SCALE KLEEN

RECOMMENDED BINS

RECOMMENDED



S400
+
SPIKA
MS400-22



SCS350
+
SPIKA
MS400-22

OTHER POSSIBLE OPTIONS



S500
+
SPIKA
MS400-22



S750
+
SPIKA
MS400-22



S900
+
SPIKA
MS400-22



S1050
+
SPIKA
MS400-22



SCS700
+
SPIKA
MS400-22



SCD900
+
1/2 SPIKA
MS400-22




SCD1350
+
1/2 SPIKA
MS400-22



SCD1800
+
1/2 SPIKA
MS400-22

TECHNICAL SCHEME

SPIKA MS400-22

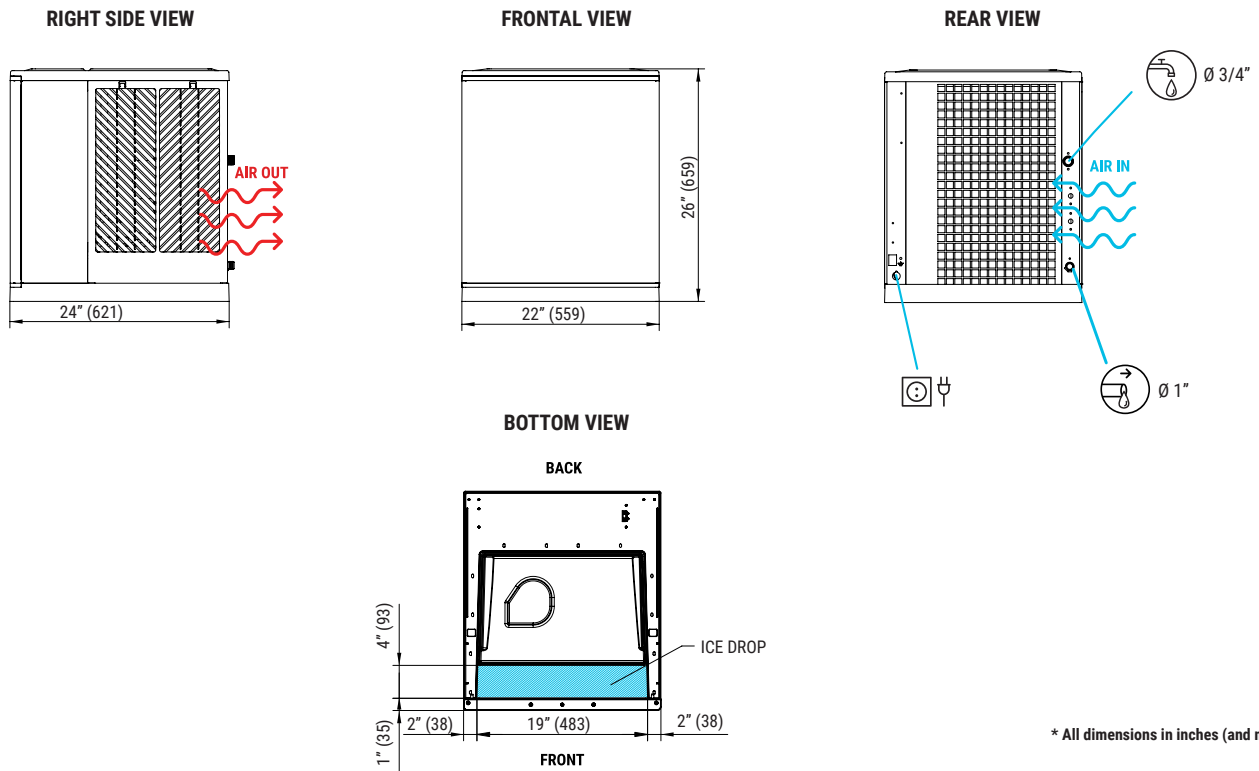

* All dimensions in inches (and mm)

OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz

±10% V

41°F/109°F

41°F/95°F

14.5 psi (1 bar) / 87 psi (6 bar)

150/300 Ice cubes/cycle

V	Hz	ph
115	60	1N

HALF DICE
SPIKA MS400-22 AIR COOLED

°F	50°	60°	70°	86°
°C	10°	15°	21°	30°
50°	441	430	417	414
10°				
68°	432	417	403	401
21°				
90°	370	357	348	344
32°				
109°	276	265	256	249
43°				

FULL DICE
SPIKA MS400-22 AIR COOLED

°F	50°	60°	70°	86°
°C	10°	15°	21°	30°
50°	-	-	-	-
10°				
68°	-	-	-	-
21°				
90°	-	-	-	-
32°				
109°	-	-	-	-
43°				

MODELS

	ASHRAE CONDITIONS (BTu/h)	(W)	(W) 109°F	(AWG/mm ²) (n.)	FUSE	100lbs 90°F / 70°F (Kwh/100 lbs)	gal 100lbs (l/h)	HEAT REJECTED (BTu/h)	(W)	(lbs)	(lbs)		
SPIKA MS400-22 A	8,501	2,490	910	14/2,5	3	16	4.48	19.1	13.1	5,227	1,531	65	77
SPIKA MS400-22 W	8,501	2,490	910	14/2,5	3	16	-	-	-	5,227	1,531	65	77



ITV Ice Makers, Inc.
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com



SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST



2 ADDITIONAL YEARS
ON COMPRESSOR &
EVAPORATOR
Read our warranty policy
to know more about
limitations and exclusions

